


- Export limitation & control
- Various models of CT are available
- Compatible with various grid types
- High current measurement precision
- 24/7 Real-time consumption monitoring
- Integrated features of WiFi/LAN/RS485

### STK

Sunways Energy Manager

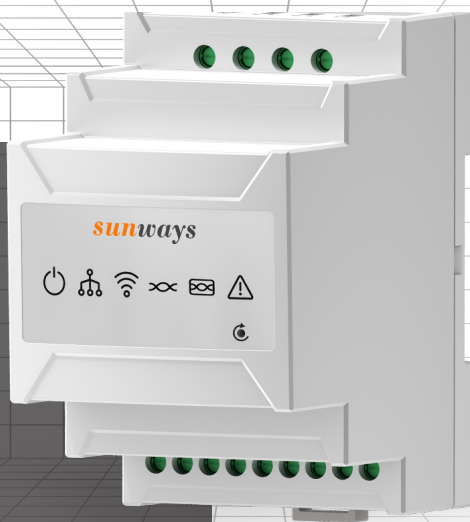

## Technical Parameters

Model		STK
Voltage Range (V)		85~280
Frequency (Hz)		50/60
Rated Current (A)		90A/120A/300 ( With CT )
Self-consumption (W)		<5
Data Detection		Current/Voltage/Active Power/Reactive Power/Frequency
Calculated Value		Power Factor/Bidirectional Active/Reactive Power
Precision	Active Power	Class 1 (IEC 62053-22)
	Reactive Power	Class 1 (IEC 62053-23)
Communication		Modbus RTU (RS485), WiFi/LAN/Bluetooth
Interface		5 LED, Reset Button
Mechanical Parameters	Terminal capacity (mm <sup>2</sup> )	0.5~4 (Copper Core Wire)
	Size [L*W*H] (mm)	85*54*75
	Weight (g)	150
	Protection Degree	IP20 (For Indoor Use)
	Installation Method	35mm DIN Rail
Operating Temperature (°C)		-25 ~ +60
Operating Humidity		<95%, No Condensation
Altitude (m)		<2500
Parallel Connection		Optional